


NORDILINER

THE RESIN-FREE REHABILITATION SYSTEM FOR
PRESSURE PIPES DN 50 UP TO DN 1200



PROVIDING SOLUTIONS

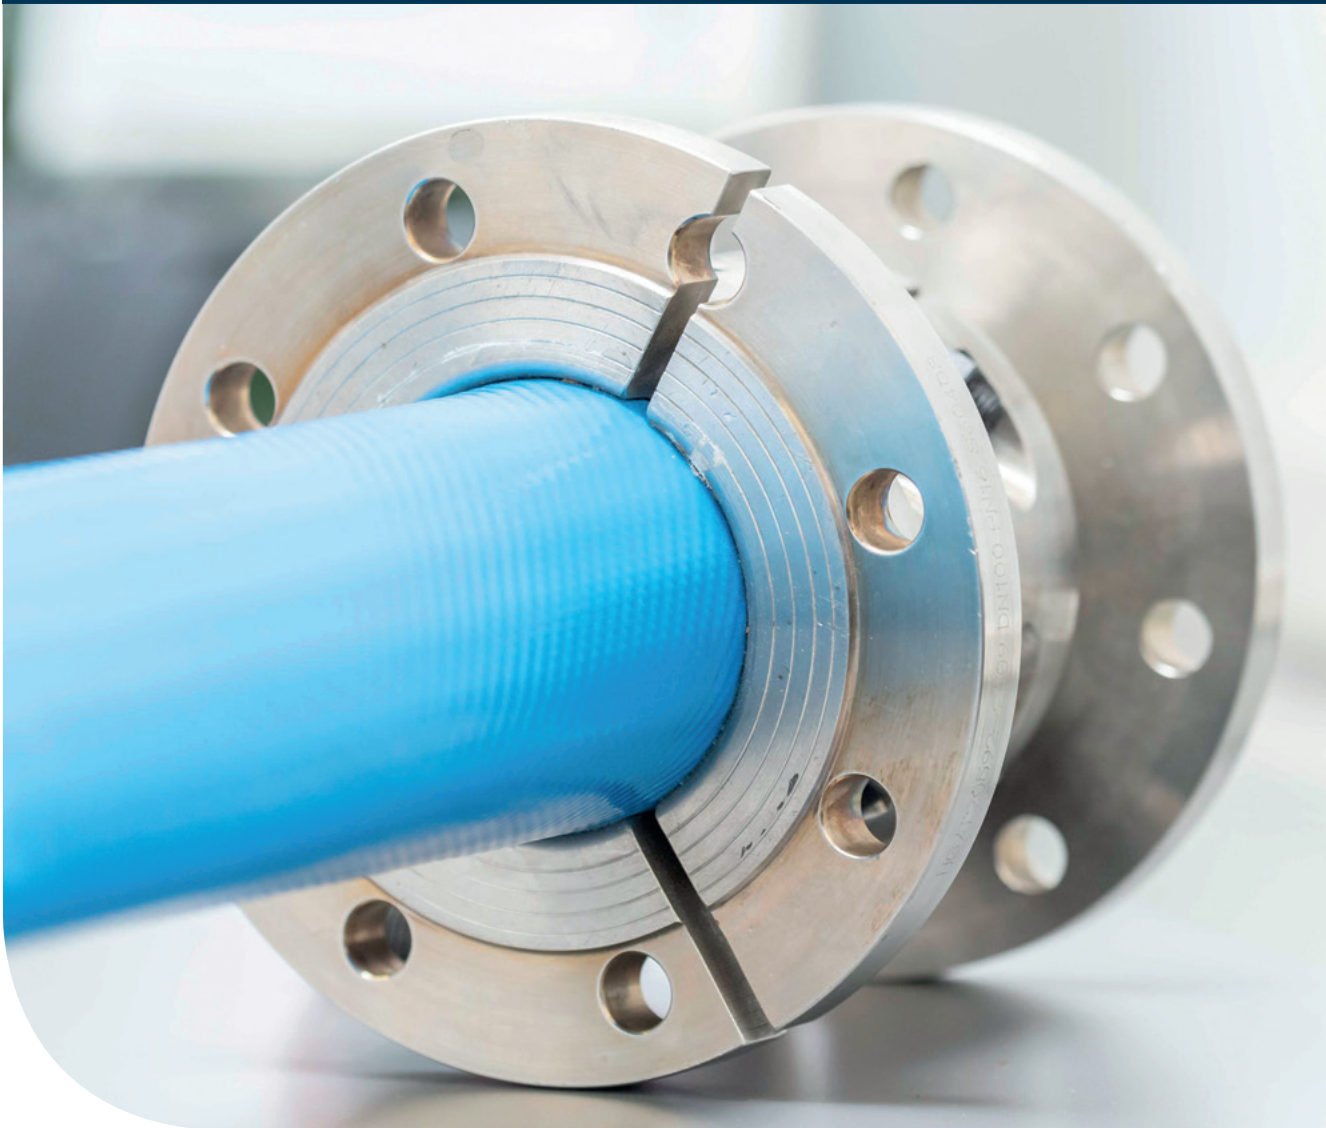




Nordiliner Bypass



The NORDILINER is the optimal solution for trenchless pipe rehabilitation of pressure pipes

Middle Layer - Fiber Reinforcement

Outer Layer - Protecting Cover

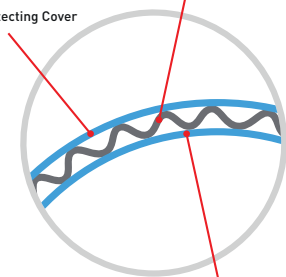

Inner Layer - Coating

The NORDILINER has a three-layered structure design

THE INDEPENDENT PRESSURE PIPE LINER

NORDILINER is a Pull-In-Place-Pipe (PIPP) and is designed for diameters from DN 50 up to 1200 mm. The system is approved for potable water, industrial water, sewer, as well as bypass applications. NORDILINER withstands the inner pressure and is independent from the host pipe.

NO RESIN, NO IMPREGNATION, NO CURING

The extremely strong and also flexible liner is folded and winched into the existing pipeline. Through the wrapped tapes the liner remains its shape during installation. Finally, the liner is inflated by using compressed air or inflates when fluid is transported under pressure without bonding to the existing pipe. The time-consuming curing as with Cured-In-Place-Pipes (CIPP) is no longer necessary. Afterwards the liner can be reconnected to the existing system with the use of the customized connectors.

PRODUCT CHARACTERISTICS

The NORDILINER is fiber reinforced. With its three-layered composition the liner combines flexibility with extremely high material strength.

Outer Layer – Protecting Cover: Polyethylene, thermoplastic polyurethane or other elastomers to protect the fiber reinforcement from damage and to ensure that the liner remains axially and radially dimensionally stable.

Middle Layer – Fiber Reinforcement: Seamless circular-woven layer that provides high resistance to internal pressure.

Inner Layer – Coating: Polyethylene, thermoplastic polyurethane or other elastomers with high chemical and temperature resistance and excellent mechanical properties.

Diameter	50-1200 mm
Coating	PE /TPU
Seamless Woven Reinforcement	Polyester /Hybrid
Pressure Rate	Water: PN4-PN40
Classification	Independent system bearing inner pressure



FOR PRESSURE PIPES

The NORDILINER is the perfect solution for relining pressure pipes of the following application areas:

- Potable Water
- Industrial Water
- Sewer
- Bypass

THE ADVANTAGES AT A GLANCE

In addition to the general advantages of trenchless pipe rehabilitation, like short installation times, preservation of infrastructure, minimal traffic disruption, low noise and dust pollution as well as active environmental protection due to CO₂ emission reduction, **the NORDILINER offers further benefits:**

- No resin, no impregnation, no curing are necessary
- DN 50 up to DN 1200 mm
- Different connector types are available suitable for various applications
- Large installation lengths up to 3 km in one pull
- Fast construction speed (1 km per 3 hours)
- Flexible liner – Installation through multiple bends of 45° and more
- Immune to negative pressure & water hammer
- Prevent internal corrosion
- Independent system bearing inner pressure
- The flexibility and self-support can avoid influence from disturbance

QUALITY & APPROVALS

The NORDILINER is tested and verified regularly by external laboratories. The system is certified according to the following standards:

- NSF/ANSI 61
- BS 6920
- AS/NZS 4020
- DM174 (EN 17416)



Individual lengths of up to 3 km on one pull





OUR GLOBAL SERVICE TEAM

Europe, Africa, Western & Central Asia, South America

NordiTube Technologies SE

Rue Ernest Solvay 181
4000 Liège
BELGIUM
+32(0) 4 254 69 10
europe@norditube.com

North & Central America

NordiTube USA LLC

3017 W County Rd STE 129
Midland, TX
USA 79706
+1 514 348 1141
+1 714 267 1030
north-america@norditube.com

Asia-Pacific

NordiTube Asia-Pacific PTE. LTD.

151 Chin Swee Road
#01-39 Manhattan House
SINGAPORE 169876
+61 410 220 382
asia-pacific@norditube.com

NordiTube AUS PTY LTD

11 Brock Street
Port Adelaide SA 5015
AUSTRALIA
+61 404 510 940
asia-pacific@norditube.com

Mainland China

5Elem & NordiTube Pipeline Technology (Shanghai) Co., Ltd

1st Floor of Building 15,
No. 481 Guiping Road
Xuhui District, Shanghai
CHINA 200233
+86 21 64900309
cn@5elem.com

NORDITUBE
TECHNOLOGIES

PROVIDING SOLUTIONS



www.norditube.com